



RFT Contact Wiring Guide

Product designed to meet the requirements of EN50131-2-6:2008 **Grade 2** and Environmental **Class II**. Suitable for use in systems designed to comply with PD6662:2017

Contact / Control Panel Colour Codes Spectrum Range

This table details the Contact colour coding system used to associate a Contact with the correct value resistors for your chosen Control Panel. The colour code is a suffix to the Contact product code. For example RFT-RD denotes a Red Contact with 4K7 and 2K2 resistors fitted.

Code	Colour	Resistor Values (Shunt/EOL)	Control Panel
RD	Red	4k7 / 2k2	ADE, Bosch, Castle, Menvier, Pyronix, Scantronic, Texecom
GN	Green	1k / 1k	Honeywell
BL	Blue	8k2 / 8k2	Guardall
GY	Grey	4k7 / 4k7	Aritech, Pyronix
PU	Purple	6k8 / 4k7	Guardtec
YL	Yellow	2k2 / 2k2	Bosch, Europlex
OR	Orange	5k6 / 5k6	DSC

Features

- 20mm diameter flush terminal contact
- Tampered Cover
- Built in EOL Resistors
- Configurable for Fully Supervised Loop (FSL) or Double Pole wiring


Operating Distances (mm)

Non-Ferrous Surface
(e.g. Wood, PVC, Aluminum)

Y	Min Close	10
	Max Open	18
+/- X	Min Close	13 [#]
	Max Open	25 [#]
Z	Min Close	5 [#]
	Max Open	12 [#]


[#] At Y = 6mm

Fixing Positions

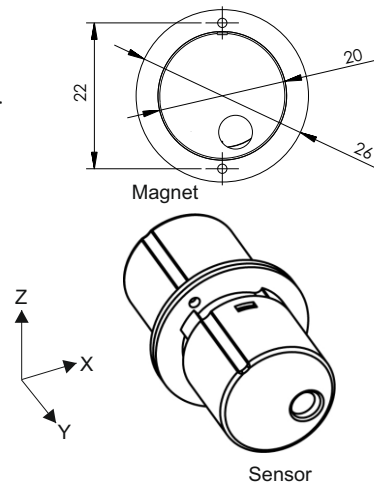


FSL/EOL

Figure 1 - Single Leaf Door Arrangement

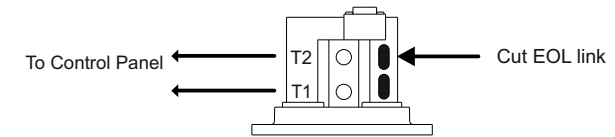


Double Pole


Figure 2 - Single Leaf Door Arrangement

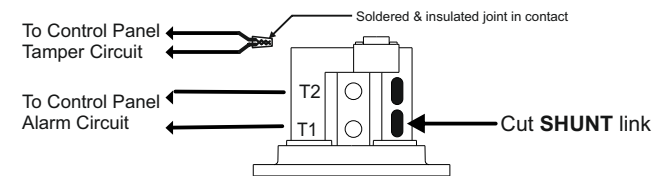

Installation Notes

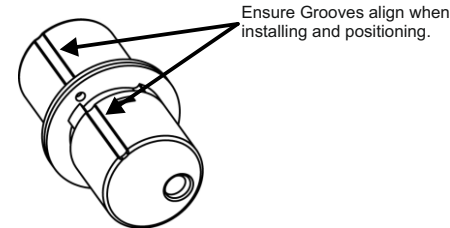

Circuit Diagram



Specifications


Contact	
Material	Rhodium
Power Handling	10VA
Voltage Rating	100Vdc, 150Vac Max
Current Rating - switch	1.0A Max
Current Rating - carry	1.5A Max
Resistance	<300mohms
Operating Life	>1 x 10 ⁸ operations

Housing	
Material	Plastic - ABS
Flange Dimension	DIA 26mm
Body Dimension	DIA 20mm
Body Depth	20mm
Fixing Dimensions	22 mm centres
Mounting	Panel Pins
IP Rating	IP40




FSL/EOL

Figure 1 - Single Leaf Door Arrangement

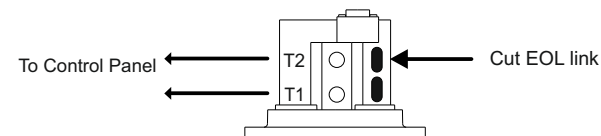

Double Pole

Figure 2 - Single Leaf Door Arrangement

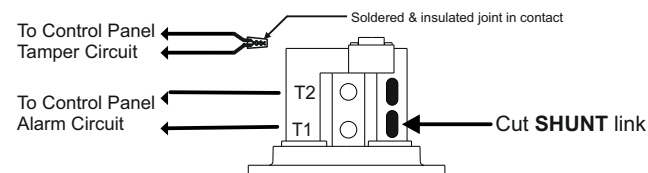

RFT Contact Wiring Guide

Product designed to meet the requirements of EN50131-2-6:2008 **Grade 2** and Environmental **Class II**. Suitable for use in systems designed to comply with PD6662:2017

Contact / Control Panel Colour Codes Spectrum Range

This table details the Contact colour coding system used to associate a Contact with the correct value resistors for your chosen Control Panel. The colour code is a suffix to the Contact product code. For example RFT-RD denotes a Red Contact with 4K7 and 2K2 resistors fitted.

Code	Colour	Resistor Values (Shunt/EOL)	Control Panel
RD	Red	4k7 / 2k2	ADE, Bosch, Castle, Menvier, Pyronix, Scantronic, Texecom
GN	Green	1k / 1k	Honeywell
BL	Blue	8k2 / 8k2	Guardall
GY	Grey	4k7 / 4k7	Aritech, Pyronix
PU	Purple	6k8 / 4k7	Guardtec
YL	Yellow	2k2 / 2k2	Bosch, Europlex
OR	Orange	5k6 / 5k6	DSC

Features

- 20mm diameter flush terminal contact
- Tampered Cover
- Built in EOL Resistors
- Configurable for Fully Supervised Loop (FSL) or Double Pole wiring



Operating Distances (mm)

Non-Ferrous Surface
(e.g. Wood, PVC, Aluminum)


Y	Min Close	10
	Max Open	18
+/- X	Min Close	13 [#]
	Max Open	25 [#]
Z	Min Close	5 [#]
	Max Open	12 [#]

[#] At Y = 6mm


Fixing Positions

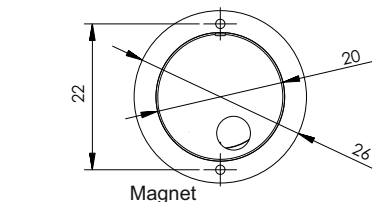

Installation Notes

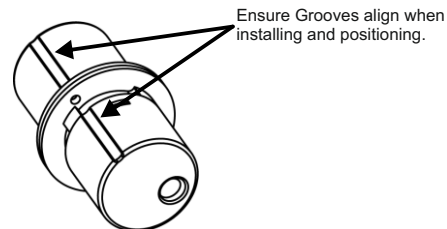

Circuit Diagram



Specifications

Contact	
Material	Rhodium
Power Handling	10VA
Voltage Rating	100Vdc, 150Vac Max
Current Rating - switch	1.0A Max
Current Rating - carry	1.5A Max
Resistance	<300mohms
Operating Life	>1 x 10 ⁸ operations

Housing	
Material	Plastic - ABS
Flange Dimension	DIA 26mm
Body Dimension	DIA 20mm
Body Depth	20mm
Fixing Dimensions	22 mm centres
Mounting	Panel Pins
IP Rating	IP40