

New 24V ac 16A CCTV PSU Range

Product Overview

New to Elmdene's popular Vision CCTV power supply range is a 24V ac 16A CCTV PSU.

Available in two models, the VR24160 is rated to full load and is provided with either 8 or 16 individually fused outputs; ideal for multi-camera installations.

- VR24160-8 24V ac 16A (8 x 2A Outputs)
- VR24160-16 24V ac 16A (16 x 1A Outputs)

Housed within a sturdy wall enclosure there are ample cable entry points on the rear of the enclosure, which are easily accessed due to the extra height provided by the enclosure standoff mounts.

Individual circuit protection is provided by 20mm fast blow fuses mounted on the Fused Output Modules (FOM's). To complement the fuses, the FOM's also feature 'fuse health' LEDs which are illuminated to indicate a channel is healthy, offering quick diagnosis of a blown fuse.

The units have been designed to complement the existing Vision products offering


Features

- 24V ac output
- Available in 8 or 16 channel versions
- Individual 'fuse health' LED indication
- Full rated current to load
- Single screw clam shell lid
- Screen printing available
- PTC fused versions available on request
- 3 year warranty

Approvals

CE Mark

RoHS Compliant

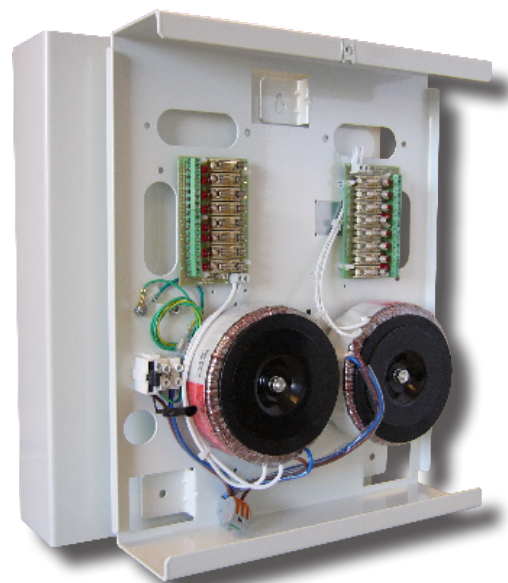

VR24160-16

Part Numbers

Part Number	Description
VR24160-8	24V ac 16A (8 x 2A) fused O/P's
VR24160-16	24V ac 16A (16 x 1A) fused O/P's

Technical Information

Mains input	230V ac nominal (+10% / -15%)
Output	24V ac
Maximum current	16A
Operating temperature	-10°C to 40°C @ 75% RH

Product Dimensions and Weight

H x W x D: 345 x 288 x 90mm

Stand off height from wall: 13mm

Enclosure: 1.5mm white powder coated steel

Weight approx: 7.45Kg

