

New Enhanced **HS-Vertec- Maxitec**



ELMDENE

*Security & Fire
Products*

Enhanced Benefits

Module fits ALL 3 products
(Polycarbonate only)

EN 50131 Compliant

VERY Low Current (200mA)

Easy replaceable battery


Piezo & battery condition monitoring

SAB/SCB selection

Enhanced Features

- CHOICE OF 4 DIFFERENT TONES
- FAULT OUTPUT: USE WITH REMOTE MAINTENANCE
- REMOTE TEST FACILITY
- AUDIBLE SOUND INDICATION WHEN CLOSING TAMPERS
- AUDIBLE SOUND IF BATTERY IS NOT CONNECTED

*External Sounders
you can rely on*

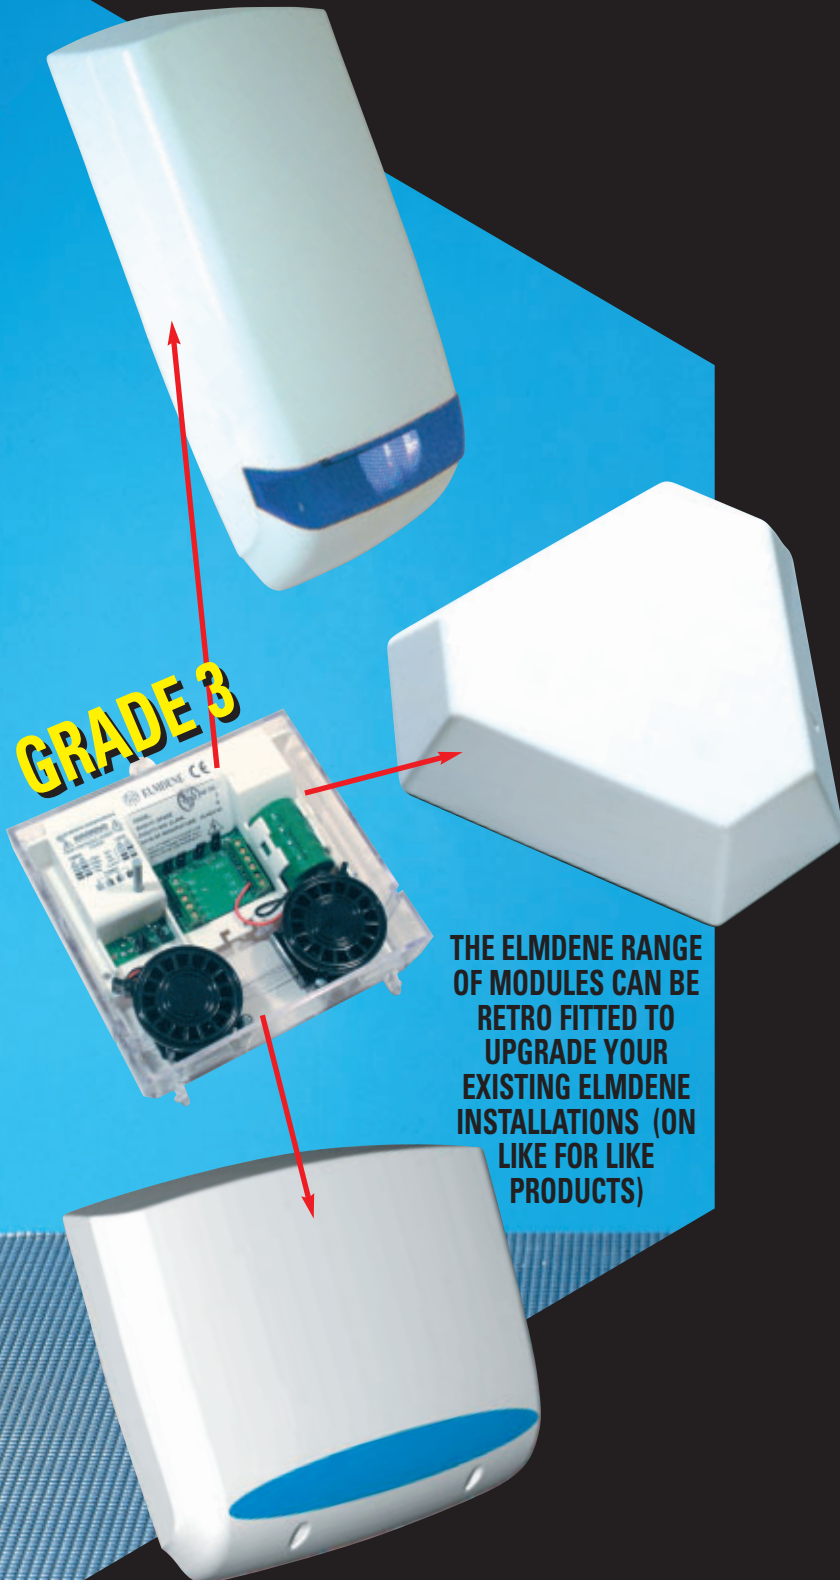


THE ELMDENE RANGE OF MODULES CAN BE RETRO FITTED TO UPGRADE YOUR EXISTING ELMDENE INSTALLATIONS (ON LIKE FOR LIKE PRODUCTS)

www.elmdene.co.uk



INTRUDER

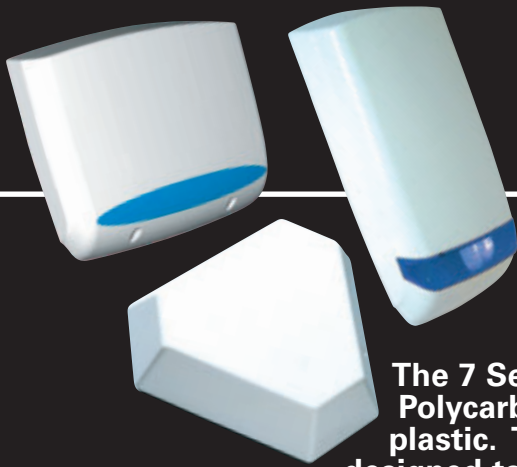

HS-Vertec-Maxitec

Specifications

The 7 Series Enhanced Range of External Sirens feature a Polycarbonate outer cover fitted over a backplate of either metal or plastic. The electronics modules are conformally coated and designed to withstand harsh external environments.

All Elmdene Sirens comply with the latest Regulations including

EN 50131-1

EN 61000-6-3

EN 50130-4

PD 6662:2004

SPECIFICATION	HS 700 (M)	VERTEC 7000 (M)	MAXITEC 700 (M)
No of Piezos	2	2	2
Sound Output (dBA at 1m)	120	120	120
Operating Voltage (vdc)	9 – 15	9 – 15	9 – 15
Siren Operating Current Nominal	100mA	100mA	100mA
Strobe Current Nominal	100mA	100mA	100mA
Cut off timer	Selectable	Selectable	Selectable
Twin LEDS	Selectable	Selectable	Selectable
Base Plate	Polycarbonate (Galvanised Steel)	Polycarbonate (Galvanised Steel)	Polycarbonate (Galvanised Steel)
Inner Cover	Polycarbonate (Galvanised Steel)	Polycarbonate (Galvanised Steel)	Polycarbonate (Galvanised Steel)
Outer Cover	Polycarbonate (3mm)	Polycarbonate (3mm)	Polycarbonate (3mm)
Silent Engineer Mode	Yes	Yes	Yes
Replaceable Battery	Yes	Yes	Yes
Internal Battery	6v NiMH	6v NiMH	6v NiMH
Tamper Detection	Cover, Rear, Module	Cover, Rear, Module	Cover, Rear, Module
Siren & Strobe Trigger	Independent	Independent	Independent
Optional Foam Detection	Yes	Yes	Yes
Screen printing area mm	200 x 220 max.	140 x 180 max.	300 x 180 max.
External Dimensions mm	330w x 290h x 75d	215w x 350h x 65d	360w x 273h x 78d
Piezo Battery Condition Monitoring	All	All	All
SAB/SCB Selection	All	All	All
Choice of 4 tones (Customer Selectable)	All	All	All
Fault output: Use with remote maintenance	All	All	All
Audible sound indication when closing tampers	All	All	All

ALL MODULES GRADE 3

ELMDENE INTERNATIONAL LIMITED
 Rodney Road, Fratton, Portsmouth PO4 8SS United Kingdom
 Tel: +44 (0)23 9273 9412 Fax: +44 (0)23 9281 1631
 e-mail: sales@elmdene.co.uk



ELMDENE

Security & Fire
 Products

www.elmdene.co.uk